
HG60 ECONOMIC GLOSS METER

- 3.5 inch large screen with high resolution full-view display
- Display 5 sets of measurement data, better for comparison
- Connect to PC, more extend functions
- Super configuration of hardware, integrated multiple innovative technologies
- Automatic calibration ,convenient and quick



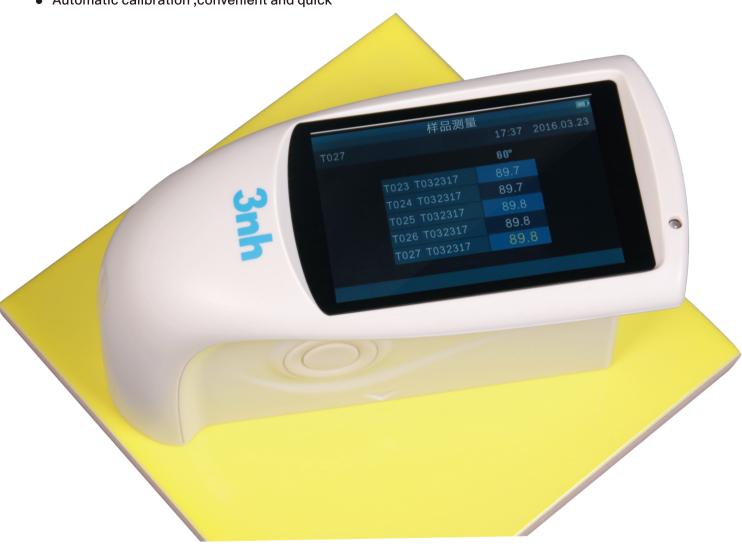

HG series economic gloss meter is independently developed by 3nh ,with independent intellectual property ,manufactured according to ISO2813 and GB/T 9754. HG series with characteristic of larger display screen ,supply with high-end QC software ,stable performance ,high accuracy and easy to use .

HG60 ECONOMIC GLOSS METER

Gloss measurement so easy with one-touch to complete!

HG60 ECONOMIC GLOSS METER

PRODUCT FEATURES

- 1.60° angle for semi gloss
- 2. Concise appearance, feel good
- 3.Display 5 sets of measurement data, good for comparison
- 4.Built-in lithium ion rechargeable battery
- 5.Basic model measurement can meet basic glossiness testing requirements
- 6.Connect to PC, more extend functions
- 7.One button for all angles measurement at the same location
- 8. Comply with international standards
- 9. Stable performance, easy to read data.



APPLICABLE INDUSTRIES



SPECIFICATION FEATURES

Model:HG60

Measuring Angle:60°

Comply with standard: ISO 2813, GB/T 9754, ASTM D 523, ASTM D 2457

Measuring Area (mm):9x15 Measuring Range:0~300GU Division Value:0.1GU

 $\begin{tabular}{ll} \textbf{Measurement Range:} 0.10GU & 10-100GU & 100-300GU \\ \textbf{Repeatability:} \pm 0.1GU & \pm 0.2GU & \pm 0.2\%GU \\ \textbf{Reproducibility:} \pm 0.2GU & \pm 0.5\%GU \\ \end{tabular}$

Measurement Standard:Conform with JJG696 secondary class glossmeter working requirement

Chromaticity Corresponding:Corresponding with CIE 1931(2°) under CIE C light source

Errors: ± 1.5 , $\pm 1.5\%$ Measuring Time: 0.5s

3nh®
Focus on Color

Dimension:L*W*H: 160mm*75mm*90mm

Weight:350g

Language: Chinese/English

Battery: 3200mAh Li-ion Battery ,>10000 times (within 8 hours)

Display:TFT 3.5 inch **Interface:**USB/RS-232 **Storage:**Basic mode: 1000

Software: GQC6 Quality Control Software with QC report printing functions

and more extended functions.

Operation Temperature:0~40°C(32~104°F) Storage Temperature:-20~50°C(-4~122°F)

Humidity:<85% relative humidity, no condensation

Standard Accessories: Power Adapter, USB cable, User Manual, GQC6 software CD

(except HG60S), Calibration Plate

Optional Accessories: Miniature Printer

Shenzhen ThreeNH Technology Co., Ltd.

Address:F/6,Block5B,SkyworthInnoValley,Tangtou1stRoad, Shiyan,BaoanDistrict,Shenzhen,P.R.China

Service Hotline: 400-666-2522 Email: 3nh@3nh.com Tel: 86-0755-26508999 Fax: 86-0755-27190609